

### GLASS PASSIVATED SUPER FAST RECOVERY BRIDGE RECTIFIERS


Voltage Range - 200 to 600 Volts    Current - 0.5/0.8 Ampere

#### Features

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed: 260°C/10 second at 5 lbs., (2.3kg) tension
- Small size, simple installation
- Leads solderable per MIL-STD-202, Method 208
- High surge current capability
- Super fast switching for high efficiency
- Glass passivated chip junction
- Glass compound (halogen & Sb<sub>2</sub>O<sub>3</sub> free)

#### Mechanical Data

- Case: Molded plastic body
- Terminals: Plated lead solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbols marked on case
- Mounting Position: Any

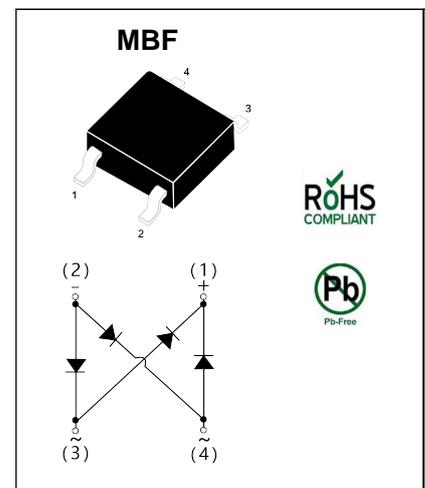

#### Specification

##### Maximum Rating And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load derate current by 20%.

	SYMBOLS	EMB2F	EMB4F	EMB6F	EMB8F	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	100	200	400	600	V
Maximum RMS voltage	V <sub>RMS</sub>	70	140	280	420	V
Maximum DC blocking voltage	V <sub>DC</sub>	100	200	400	600	V
Maximum average forward rectified current						
On glass-epoxy P.C.B. (Note 1)	I <sub>F(AV)</sub>		0.5			A
On aluminum substrate (Note 2)			0.8			
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>		30			A
Maximum instantaneous forward voltage drop per leg at 0.4A	V <sub>F</sub>	0.95		1.25	1.7	V
Maximum DC reverse current	I <sub>R</sub>		5.0			uA
at rated DC blocking voltage			500			uA
Typical thermal resistance (NOTE 3)	R(θ) <sub>JL</sub>		30			°C/W
	R(θ) <sub>JA</sub>		88			
Maximum reverse recovery time (NOTE 4)	t <sub>rr</sub>		35			ns
Operating temperature range	T <sub>J</sub>		-55 to +150			°C
storage temperature range	T <sub>STG</sub>		-55 to +150			°C

NOTES: 1. On glass epoxy P.C.B. mounted on 0.05x0.05" (1.3x1.3mm) pads.  
2. On aluminum substrate P.C.B. with an area of 0.8"x0.8" (20x20mm) mounted on 0.05x0.05" (1.3x1.3mm) solder pad.  
3. Thermal resistance from junction to ambient and junction to lead mounted on P.C.B. with 0.2x0.2" (5x5mm) copper pads.  
4. Reverse recovery condition I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A.

### Ratings and characteristic curves EMB2F thru EMB8F

FIG.1 FORWARD DERATING CURVE

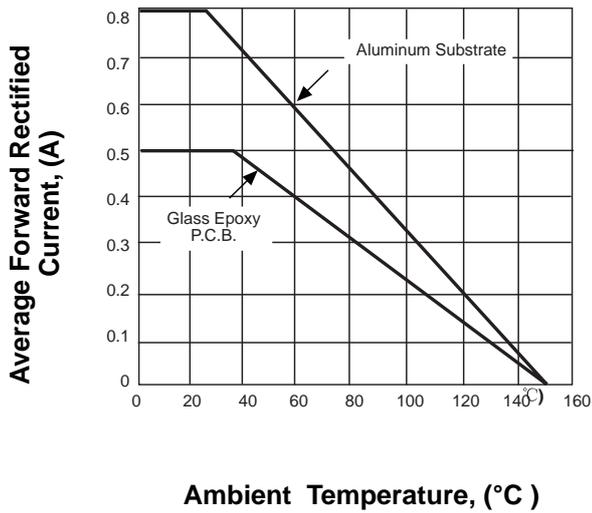


FIG.2 PEAK FORWARD SURGE CURRENT

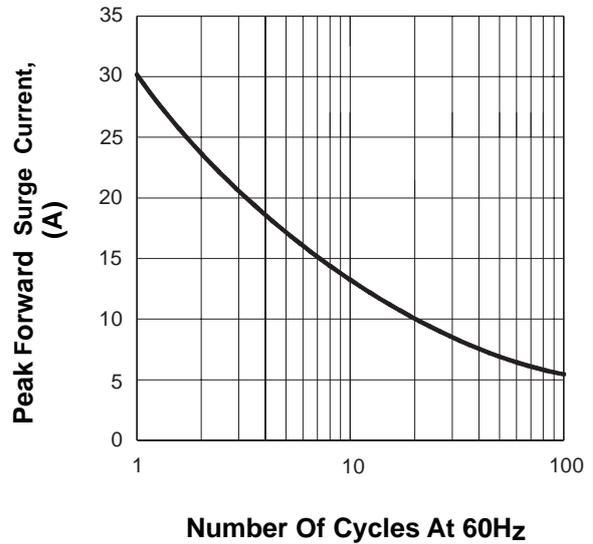


FIG.3 TYPICAL FORWARD CHARACTERISTICS



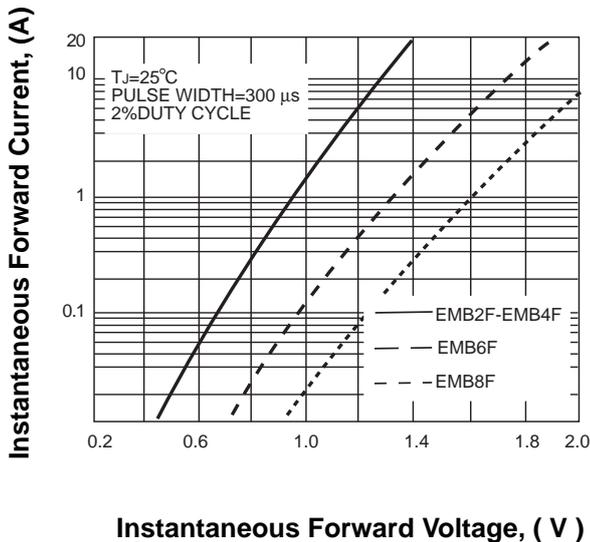


FIG.4 TYPICAL REVERSE CHARACTERISTICS

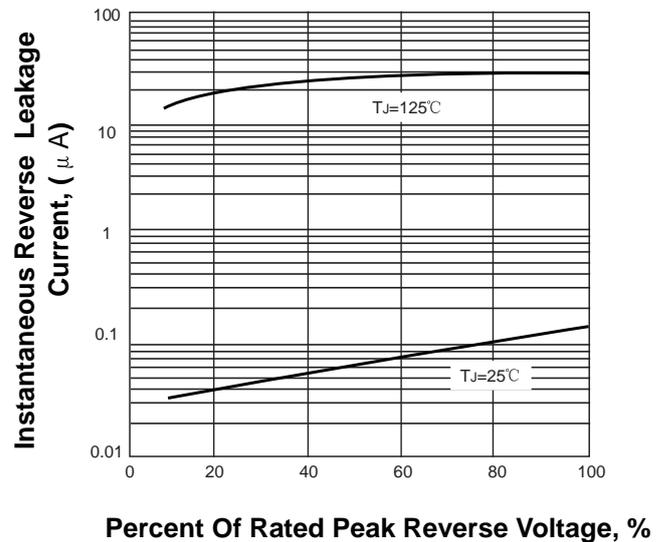


### 1、 Marking



SYMBOL	Explanation
A	Product Name

### 2、 Packaging

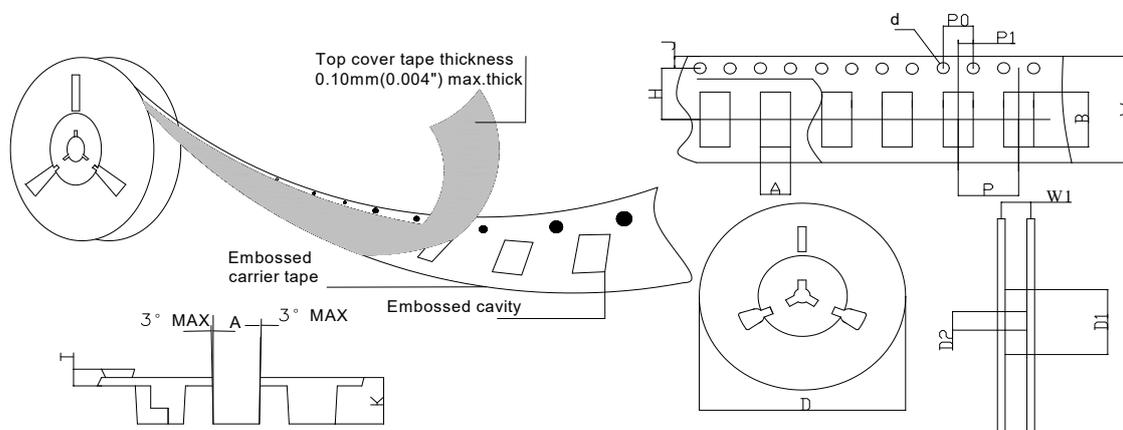


SPECIFICATIONS mm(inch)		PACKAGE	SPECIFICATIONS mm(inch)		PACKAGE
ITEM	SYM BOL	MBF	ITEM	SYM BOL	MBF
Carrier width	A	5.15(0.203)Max	Carrier depth	K	2.88(0.113)Typ
Carrier length	B	7.25(0.285)Max	Punch hole pitch	P	8.00(0.315)Typ
Sprocket hole	d	ø1.55(0.061)Typ	Sprocket hole pitch	P0	4.00(0.157)Typ
Reel outer diameter	D	330.0(13.0)Typ	Embossment center	P1	2.00(0.079)Typ
Reel inner diameter	D1	50.0(2.913)Min	Overall tape thickness	T	0.30(0.012)Typ
Feed hole diameter	D2	13.0(0.512)Typ	Tape width	W	12.0(0.472)Typ
Sprocket hole position	J	1.75(0.069)Typ	Reel width	W1	12.4(0.488)Min
Punch hole position	H	5.50(0.217)Typ			

### 3、 Ordering Information

Part Number	Compliance	Case	Packaging
EMBXF	Standard	MBF	5000/Tape & Reel

### Dimension

#### MBF

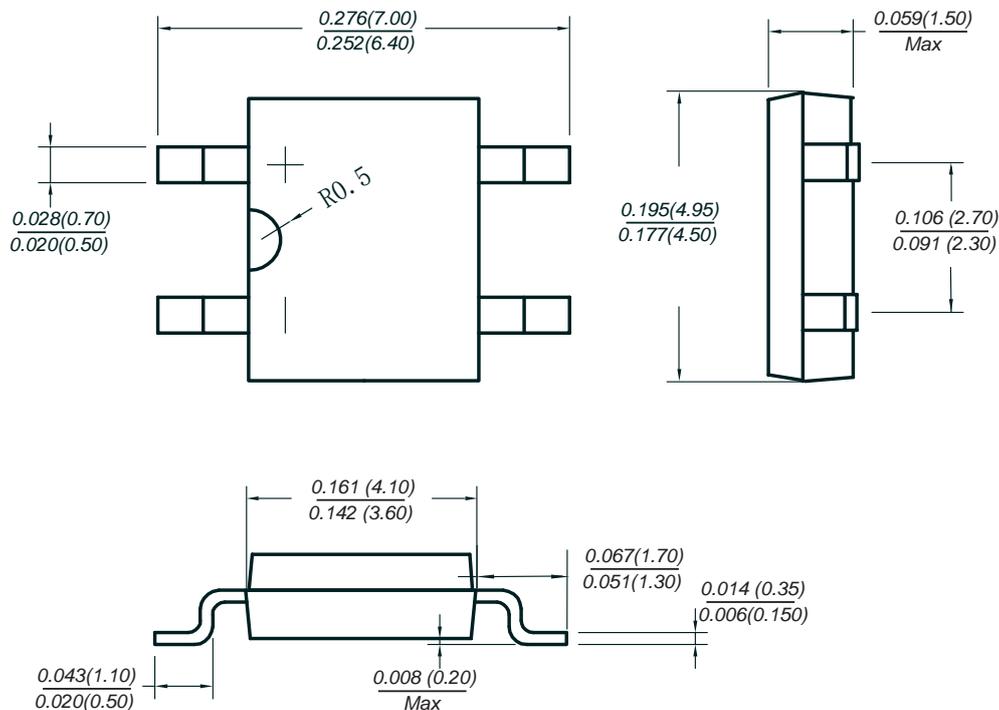

*Dimensions in inches and (millimeters)*

### DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for

- (1) selecting the appropriate JHG products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.