

SILICON TRANSISTOR NPN SILICON EPITAXIAL TRANSISTOR POWER MINI MOLD

DESCRIPTION

The 2SC3357 is an NPN silicon epitaxial transistor designed for low noise amplifier at VHF, UHF and CATV band. It has large dynamic range and good current characteristic.

FEATURES

• Low Noise and High Gain

NF = 1.1 dB TYP., Ga = 8.0 dB TYP. @VCE = 10 V,

IC = 7 mA, f = 1.0 GHz

NF = 1.8 dB TYP., Ga = 9.0 dB TYP. @VCE = 10 V,

IC = 40 mA, f = 1.0 GHz


• Large PT in Small Package

PT: 2 W with 16 cm2 \times 0.7 mm Ceramic Substrate.

ABSOLUTE MAXIMUM RATINGS (TA = 25 °C)

Collector to Base Voltage	VCBO	20	V
Collector to Emitter Voltage	VCEO	12	V
Emitter to Base Voltage	VEBO	3.0	V
Collector Current	IC	100	mA
Total Power Dissipation	PT*	1.2	W
Thermal Resistance	Rth(j-a)*	62.5	° C/W
Junction Temperature	Tj	150	° C
Storage Temperature	Tstg	-65 to +150	° C

^{*} mounted on 16 cm2 imes 0.7 mm Ceramic Substrate



0755-23619906 www.jhgsz.com/ Rev.01 1/5



ELECTRICAL CHARACTERISTICS (TA = 25 °C)


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	Ісво			1.0	μΑ	V _{CB} = 10 V, I _E = 0
Emitter Cutoff Current	ІЕВО			1.0	μΑ	V _{EB} = 1.0 V, I _C = 0
DC Current Gain	hfE*	50	120	300		VcE = 10 V, Ic = 20 mA
Gain Bandwidth Product	f⊤		6.5		GHz	V _{CE} = 10 V, I _C = 20 mA
Feed-Back Capacitance	Cre**		0.65	1.0	pF	V _{CB} = 10 V, I _E = 0, f = 1.0 MHz
Insertion Power Gain	S ₂₁ e ²		9		dB	V _{CE} = 10 V, I _C = 20 mA, f = 1.0 GHz
Noise Figure	NF		1.1		dB	V _{CE} = 10 V, I _C = 7 mA, f = 1.0 GHz
Noise Figure	NF		1.8	3.0	dB	V _{CE} = 10 V, I _C = 40 mA, f = 1.0 GHz


^{*} Pulse Measurement PW \leq 350 μ s, Duty Cycle \leq 2 %

hfe Classification

Class	RH	RF	RE
Marking	RH	RF	RE
hfe	50 to 100	80 to 160	125 to 250

TYPICAL CHARACTERISTICS (TA = 25 °C)

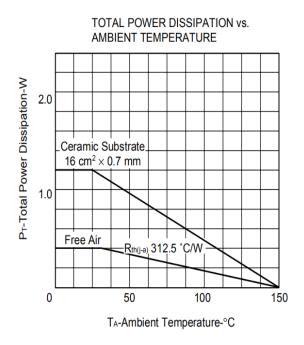

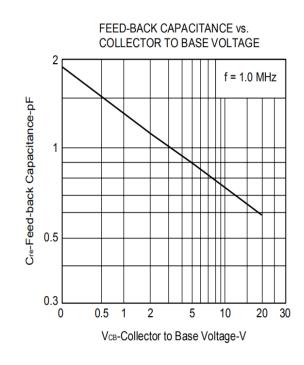



0755-23619906 www.jhgsz.com/ Rev.01 2 / 5


^{**} The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitnace bridge.





Typical Characteristics

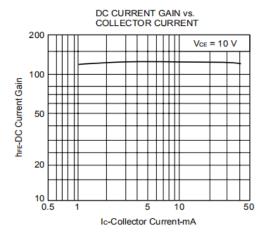




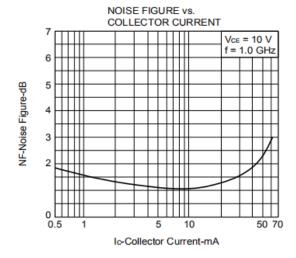

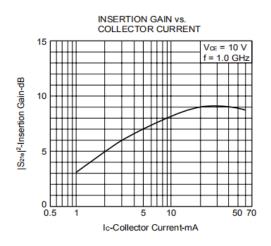

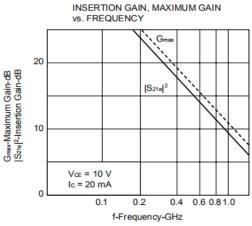

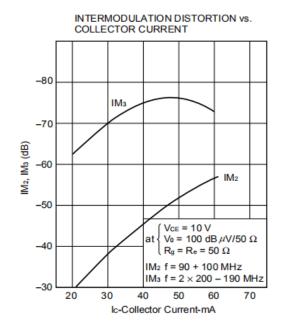


0755-23619906 www.jhgsz.com/ Rev.01 3 / 5




SOT-89-3L Tape and Reel


SOT-89-3L Embossed Carrier Tape

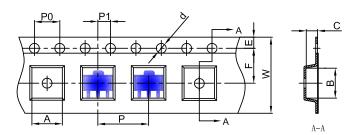


Dimensions are in millimeter										
Pkg type	Α	В	С	d	E	F	P0	Р	P1	W
SOT-89-3L	4.85	4.45	1.85	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

SOT-89-3L Tape Leader and Trailer

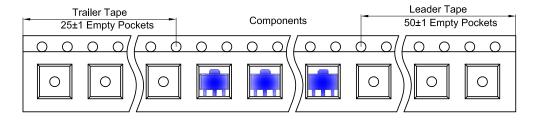



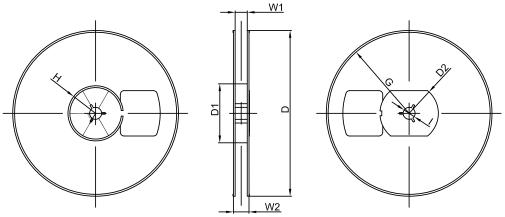



	Dimensions are in millimeter							
Reel Option	D	D1	D2	G	Н	I	W1	W2
7"Dia	Ø180.00	60.00	R32.00	R86.50	R30.00	Ø13.00	13.20	16.50


REEL	Reel Size	Вох	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
1000 pcs	7 inch	10,000 pcs	203×203×195	40,000 pcs	438×438×220	

0755-23619906 www.jhgsz.com/ Rev.01 4 / 5



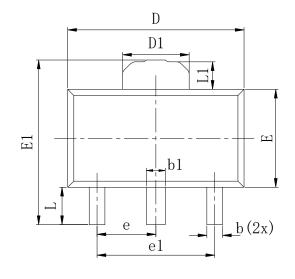



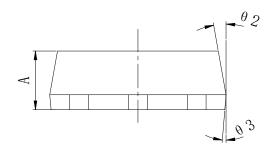

CYMDOL		MILLIMETER				
SYMBOL	MIN	TYP.	MAX			
A	1.400	1.500	1.600			
b	0.320	0.400	0. 520			
b1	0.400	0.480	0.580			
С	0.350	0. 381	0.440			
D	4. 400	4. 500	4.600			
D1	1. 700REF					
Е	2. 400	2. 500	2.600			
E1	4.050	4. 200	4. 350			
е	1. 500TYP.					
e1	3. 000TYP.					
L	0.800	0.950	1. 200			
L1	0. 700REF					
θ	10° REF					
θ 1	8° REF					
θ2	10° REF					
θ 3	5° REF					

DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for (1)selecting the appropriate JHG products for your application;

(2)designing, validating and testing your application;

(3)ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

0755-23619906 www.jhgsz.com/ Rev.01 5 / 5