


### SILICON PLANAR ZENER DIODES

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

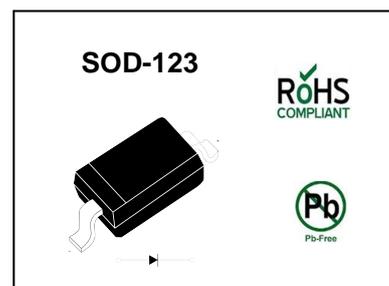

#### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Total Device Dissipation	$P_{tot}$	500	mW
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{Stg}$	- 55 to + 150	$^\circ\text{C}$


#### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	0.9	V


Type	Marking Code	Zener Voltage <sup>1)</sup>				Reverse Leakage Current		
		V <sub>ZT</sub> (V)			at I <sub>ZT</sub>	I <sub>R</sub>	at V <sub>R</sub>	
		Nom.	Min.	Max.	μA	Max. (μA)	V	
MM1Z4689	BX	5.1	4.85	5.36	50	10	3	
MM1Z4690	BY	5.6	5.32	5.88	50	10	4	
MM1Z4691	BZ	6.2	5.89	6.51	50	10	5	
MM1Z4692	CA	6.8	6.46	7.14	50	10	5.1	
MM1Z4693	CB	7.5	7.13	7.88	50	10	5.7	
MM1Z4694	CC	8.2	7.79	8.61	50	1	6.2	
MM1Z4696	CE	9.1	8.65	9.56	50	1	6.9	
MM1Z4697	CF	10	9.5	10.5	50	1	7.6	
MM1Z4698	CH	11	10.45	11.55	50	0.05	8.4	
MM1Z4699	CJ	12	11.4	12.6	50	0.05	9.1	
MM1Z4700	CK	13	12.35	13.65	50	0.05	9.8	
MM1Z4702	CN	15	14.25	15.75	50	0.05	11.4	
MM1Z4703	CP	16	15.2	16.8	50	0.05	12.1	
MM1Z4705	CX	18	17.1	18.9	50	0.05	13.6	
MM1Z4707	CZ	20	19	21	50	0.01	15.2	
MM1Z4708	DA	22	20.9	23.1	50	0.01	16.7	
MM1Z4709	DB	24	22.8	25.2	50	0.01	18.2	
MM1Z4711	DD	27	25.65	28.35	50	0.01	20.4	
MM1Z4713	DF	30	28.5	31.5	50	0.01	22.8	
MM1Z4714	DH	33	31.35	34.65	50	0.01	25	
MM1Z4715	DJ	36	34.2	37.8	50	0.01	27.3	
MM1Z4716	DK	39	37.05	40.95	50	0.01	29.6	
MM1Z4717	DM	43	40.85	45.15	50	0.01	32.6	

<sup>1)</sup> Tested with pulses tp = 20 ms.


**FIG.1 - TEMPERATURE COEFFICIENTS**  
(TEMPERATURE RANGE -55 °C to +150 °C)

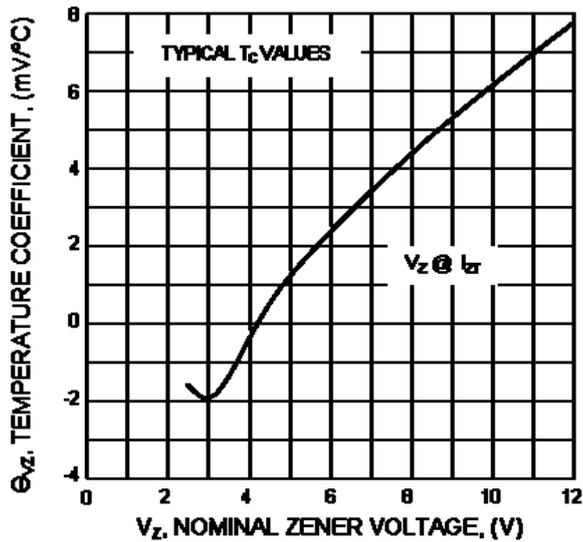


**FIG.2 - TEMPERATURE COEFFICIENTS**  
(TEMPERATURE RANGE -55 °C to +150 °C)

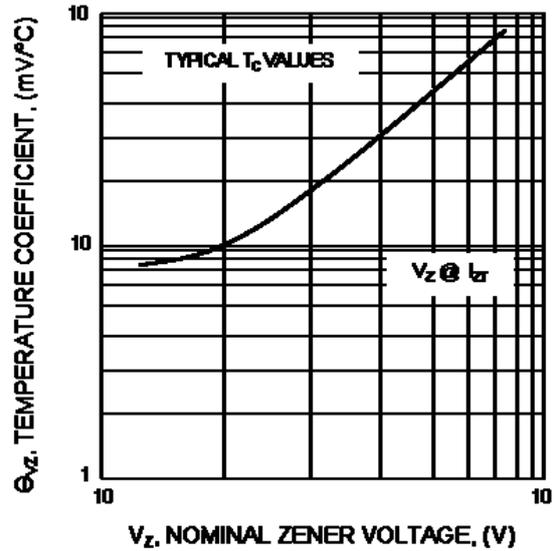

**FIG.3 - TYPICAL FORWARD VOLTAGE**

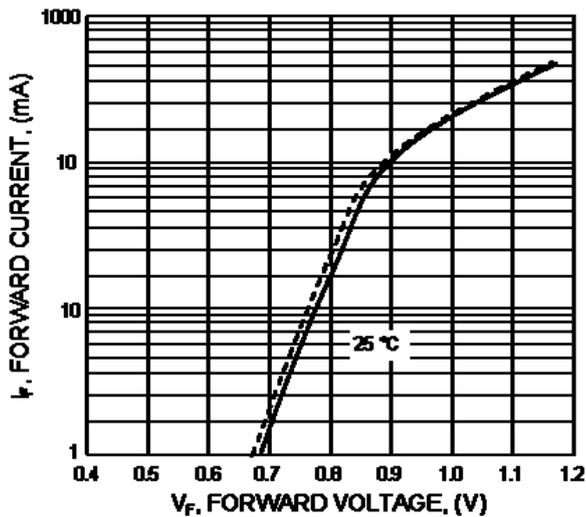


**FIG.4 - MAXIMUM NON-REPETITIVE SURGE POWER**

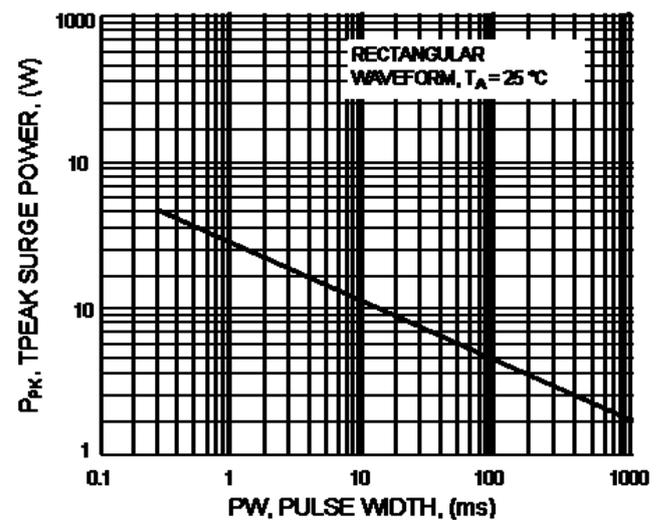


### SOD-123 Tape and Reel

#### SOD-123 Embossed Carrier Tape

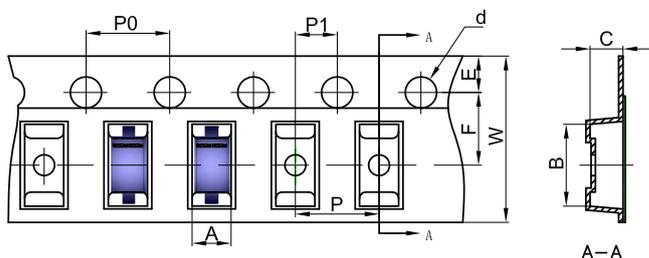


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOD-123	1.85	3.95	1.57	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

#### SOD-123 Tape Leader and Trailer

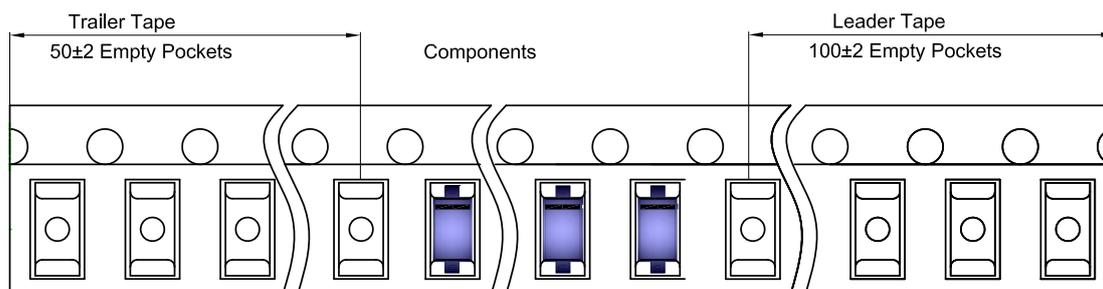


#### SOD-123 Reel

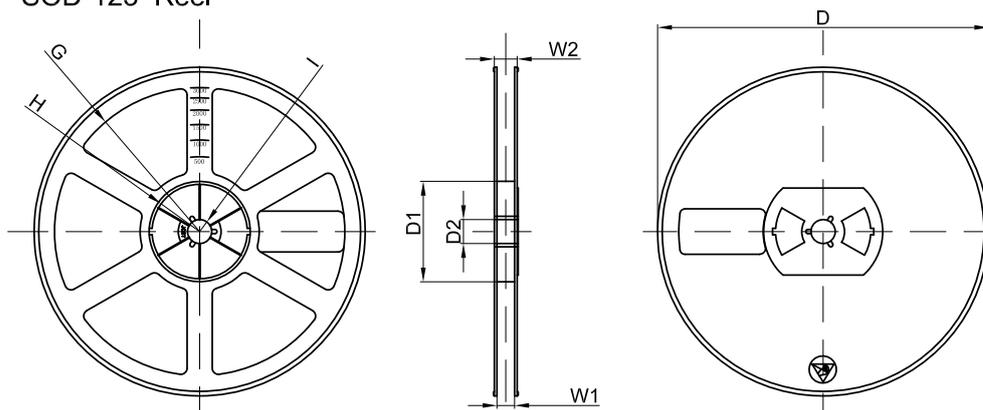

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	

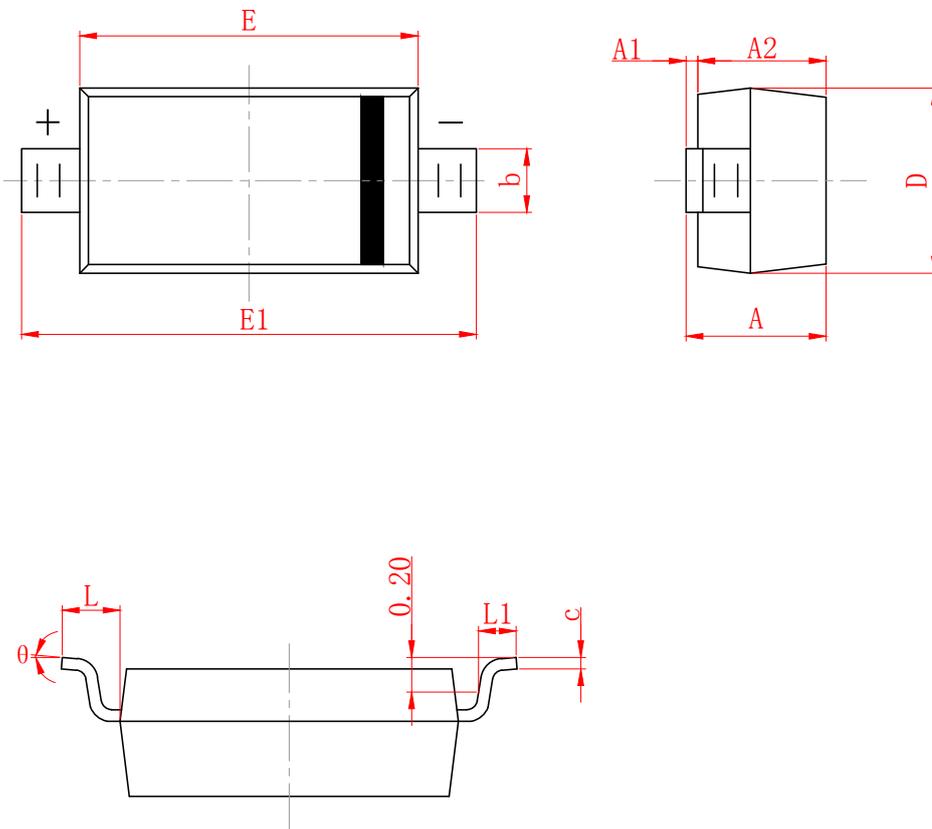

SYMBOL	MILLIMETER	
	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.450	0.650
c	0.008	0.150
D	1.500	1.700
E	2.600	2.800
E1	3.550	3.850
L	0.500 (REF)	
L1	0.250	0.450
$\theta$	0°	8°

### DISCLAIMER

JHG PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with JHG products. You are solely responsible for

- (1) selecting the appropriate JHG products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. JHG grants you permission to use these resources only for development of an application that uses the JHG products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other JHG intellectual property right or to any third party intellectual property right. JHG disclaims responsibility for, and you will fully indemnify JHG and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.